


BKD 90

Click System

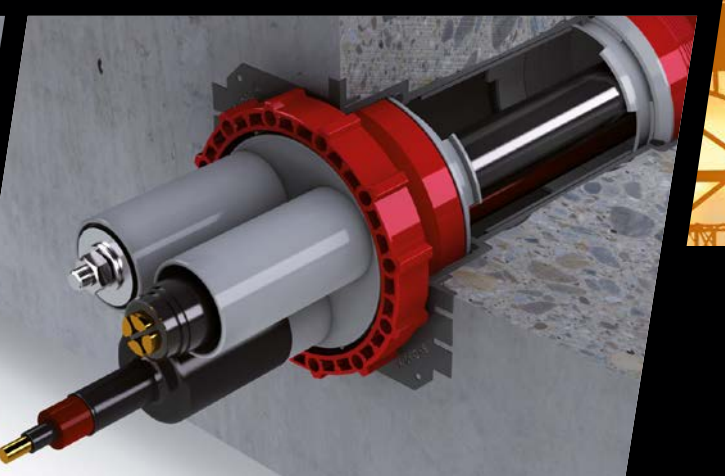

Universal entry options
for cables and pipes.

BKD 90 system




- Universal cable and conduit feed-through options
- Sealing using heat-shrink tubing, either hot or cold shrink
- Instantly gas- and watertight.
- Environmentally friendly and chemical-resistant.

BKD 90 cable transit

The housing is halogen-free and features a bayonet lock system. It comes standard with a pressure-resistant blind cap. Of course, the IBMO high-pressure seals also fit into the housing.

The connection between the pipe and the housing is sealed with pressure-resistant, sanded tape.


BKD 90 single wall insert

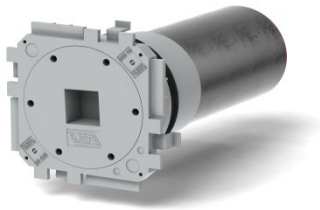

For a single-end connection with a bayonet coupling system or high-pressure seal.

BKD 90-1Z

BKD 90 double wall insert

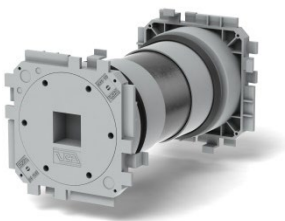

For a two-way connection with a bayonet lock system or high-pressure seal.

BKD 90-1Z

BKD 90 Angular single wall insert




For installation in formwork, including steel angle brackets and mounting wedges. Reliably seal sloping penetrations at angles of 30°, 45° and 60°

Minimum wall thickness: 250 mm.

BKS 90-1Z

BKD 90 Angular double wall insert

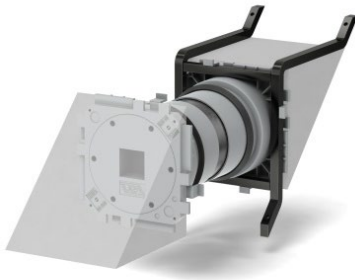

For installation in formwork, including steel angle brackets and mounting wedges; Double-seal sloping penetrations at an angle of 30°, 45° and 60°

minimum wall thickness 250 mm.

BKD 90-2Z

BKD 90 system cover for housing and aluminum front flange

De BKD 90 system cover with pipe connection for plug-in cable glands or with optional socket connection for flexible cable glands.

BKD system cover with pipe connection



Threaded. Suitable for pipes 75 mm, 85 mm, 110 mm. Simply slide these into the connection

SD-PV 75
SD-PV 85
SD-PV 110

BKD 90 system cover with socket connection



Threaded.
The connection to pipes with diameters of
75 mm, 85 mm, and 110 mm
is made using a cold-fusion or compression fitting.

Sealing inserts with pipe connections

For standard housing and aluminum front flange
BKD90-D-1/3/5

- Easy installation.
- No special tools required.
- Instantly waterproofs cables or pipes with the heat-shrink sleeve
- Suitable for 1, 3, or 5 cables.
- Gas- and water-tight up to 2.5 bar.
- All sleeves are also available with heat-shrink tubing

**With a single-socket connection and
Heat-shrink tubing, for cable 26–73 mm**



**With a 3 socket connection
with 3 cables 12-29mm**



**With 5-pin connectors and
heat-shrink tubing for cables 7–19 mm**



Seals and inserts for housing and aluminum front flange



HDA 90/G/1/4x...



HDA 90/G/1/(0-56)




For ribbed pipe



For cable and pipe

Aluminum front flange for Click System BKD 90

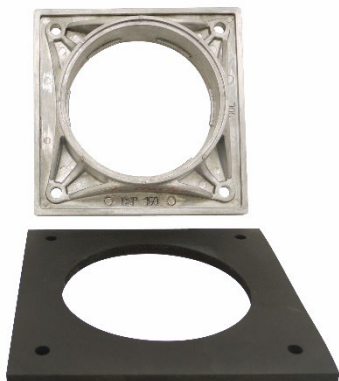

For installation in an existing pass-through with a maximum opening size of 90 mm. Compatible with all system covers and pressure seals.